




Histology Solutions

HEALTHSKY



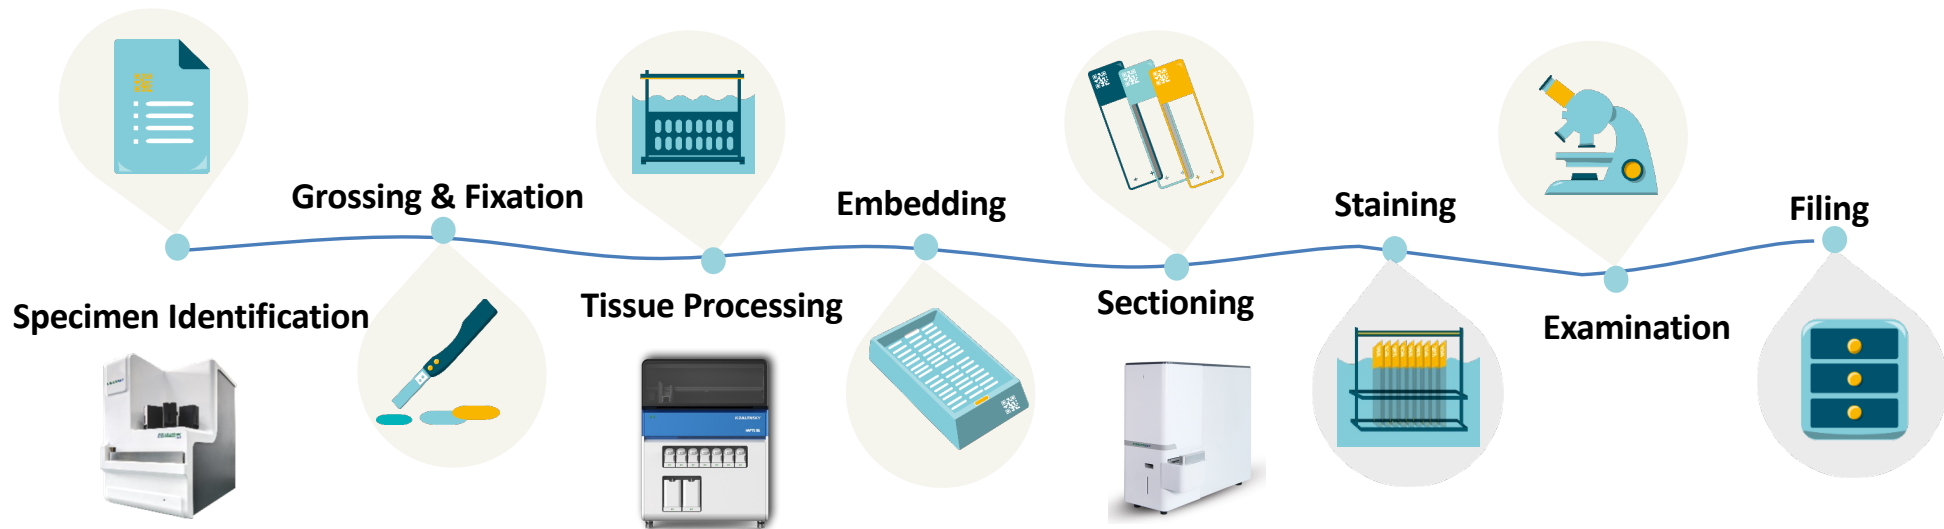

Histology Solutions-Printers

HEALTHSKY

Printers Comparison:

Comparison	 Laser Printer	 Thermal transfer Printer	 Inkjet Printer
Print Speed	Fastest	Fast	Slow
Print Performance	Clear & Sharp	Clear & Sharp	Edge illegible
Print Durability	Fastness	May smudge and stain when exposed to reagents	May smudge and stain when exposed to reagents
Extra Consumables	No	Print ribbon	Ink Cartridge
Maintenance	Firm and durable Minimum maintenance	Print head is easy to be damaged	Inkjet print head is easy to be damaged




Histology Solutions-Printers

HEALTHSKY

EBMarker-160

Infrared Laser Cassette Printer

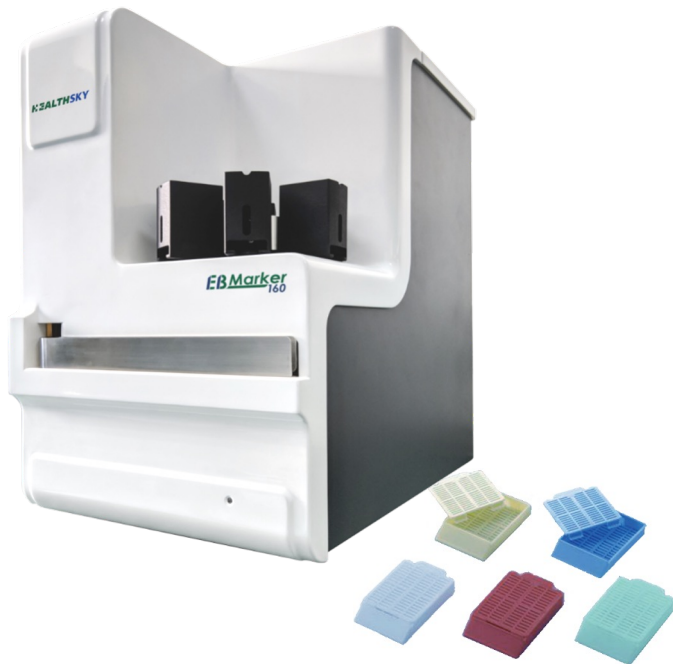

Efficient and Quality Batch Printing

Specification:

Printing Technology	Infrared Laser
Model	EBmarker-160
Compatible Cassette	45° angle marking surface, POM material with laser absorber
Print Speed	3~4 Second/ Cassette
Load Capacity	6 hoppers, up to 600 cassettes
Print Content	Alphanumeric, 1D and 2D barcodes, Graphics, Logos
Auxiliary Functions	Repetitive task reminder, Running fault alarm
Operation & Display	PC
Software Compatibility	Windows10, Windows 7, x64/x86; Windows XP
Data Interface	Wire
Integration	LIS/HIS
Dimension (L × W × H)	320 × 400 × 500 (mm)
Weight	22 kg



Histology Solutions-Printers

HEALTHSKY

EMarker-11A-C100

Infrared Laser Cassette Printer



Compact and Economic

Specification:

Principle	Infrared Laser
Model	EMarker-11A-C100
Compatible Cassette	45° angle marking surface, POM material with laser absorber
Print Speed	3~4 Second/ Cassette
Load Capacity	Up to 100 cassettes
Print Content	Alphanumeric, 1D and 2D barcodes, Graphics, Logos
Auxiliary Functions	Repetitive task reminder, Running fault alarm
Operation & Display	PC
Software Compatibility	Windows10, Windows 7, x64/x86; Windows XP
Data Interface	Wire
Integration	LIS/HIS
Dimension (L × W × H)	150 × 420 × 380 (mm)
Weight	15 kg



Histology Solutions-Printers

HEALTHSKY

EMarker-11A-S100

Infrared Laser Slide Printer



Specification:

Principle	Infrared Laser
Model	EMarker-11A-S100
Compatible Slide	Slides with laser absorber (L≤75.8 x W≤25.7 mm, thickness 1.1 ± 0.1mm)
Print Speed	3~4 Second/ Slide
Load Capacity	100 slides
Print Content	Alphanumeric, 1D and 2D barcodes, Graphics, Logos
Auxiliary Functions	Dust filter, Scan input Repetitive task reminder, Running fault alarm
Operation & Display	PC
Software Compatibility	Windows10, Windows 7, x64/x86; Windows XP
Data Interface	Wire
Integration	LIS/HIS
Dimension (L × W × H)	150×420×380 (mm)
Weight	15 kg

On-demand printing or batch printing



Histology Solutions-Printers

HEALTHSKY

Emarker-21A-C600

Ultraviolet Laser Cassette Printer



Efficient and Quality Batch Printing

Specification:

Printing Technology	UV Laser
Model	Emarker-21A-C600
Compatible Cassette	Cassette with 45° writing surface
Print Speed	3~4 Second/ Cassette
Load Capacity	6 hoppers, up to 600 cassettes
Print Content	Alphanumeric, 1D and 2D barcodes, Graphics, Logos
Auxiliary Functions	Repetitive task reminder, Running fault alarm
Operation & Display	PC
Software Compatibility	Windows10, Windows 7, x64/x86; Windows XP
Data Interface	Wire
Integration	LIS/HIS
Dimension (L × W × H)	320 × 400 × 500 (mm)
Weight	22 kg



Histology Solutions-Printers

HEALTHSKY

EMarker-21A-C100

Ultraviolet Laser Cassette Printer



Specification:

Principle	UV Laser
Model	EMarker-21A-C100
Compatible Cassette	Cassette with 45° writing surface
Print Speed	3~4 Second/ Cassette
Load Capacity	100 cassettes
Print Content	Alphanumeric, 1D and 2D barcodes, Graphics, Logos
Auxiliary Functions	Repetitive task reminder, Running fault alarm
Operation & Display	PC/Windows tablet
Software Compatibility	Windows11/10/8/7, x64/x32; Windows XP
Data Interface	Wire
Integration	LIS/HIS
Dimension (L × W × H)	245 × 410 × 360 (mm)
Weight	21 kg



Histology Solutions-Printers

HEALTHSKY

EMarker-11A-S110

Ultraviolet Laser Slide Printer



Ultraviolet Laser

Specification:

Principle	UV Laser
Model	EMarker-11A-S110
Compatible Slide	Color coated microscope slides ($L \leq 76.2 \times W \leq 25.7$ mm, thickness 1.1 ± 0.1 mm)
Print Speed	3~4 Second/ Slide
Load Capacity	100 slides
Print Content	Alphanumeric, 1D and 2D barcodes, Graphics, Logos
Auxiliary Functions	Dust filter, Scan input, Automated slide collector Repetitive task reminder, Running fault alarm
Operation & Display	PC
Software Compatibility	Windows11/10/8/7, x64/x32; Windows XP
Data Interface	Wire
Integration	LIS/HIS
Dimension (L × W × H)	245 × 410 × 360 (mm)
Weight	21 kg

